


ClassicLine body safety shower with valve, ceiling mounted, exposed pipework

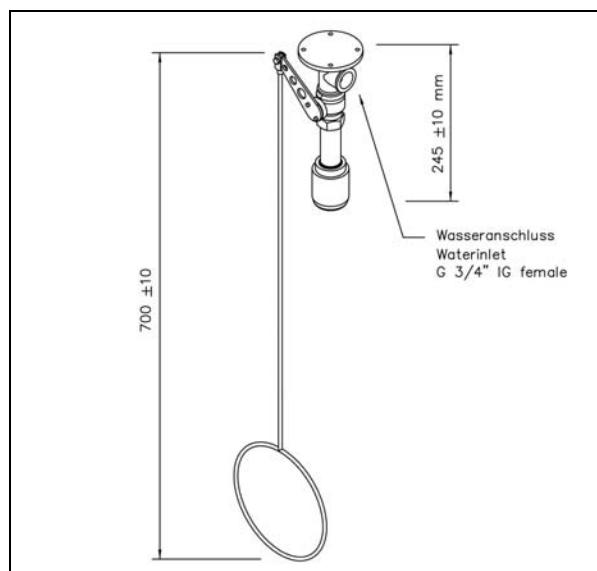

- shower arm 3/4" made of brass, chemical resistant powder coated, total length 245 mm
- ceiling flange 3/4" made of brass, chemical resistant powder coated, water inlet 3/4" female
- ball valve 3/4" made of stainless steel, with pull rod, DIN-DVGW tested and certificated
- pull rod made of steel, chemical resistant powder coated, length 700 mm
- high-performance shower head made of chemical resistant plastics, with improved spray pattern, corrosion resistant, largely scale and maintenance-free, very robust, self-draining
- integrated automatic flow regulation 50 l/min. for a spray pattern acc. to the norms at a specified operating range of 1.5 to 3 bar dynamic water pressure
- sign for body safety shower according to DIN 4844-2-D and BGV A8, self-adhesive 150 x 150 mm
- installation height according to norms as listed below: lower edge of the shower head must be 2200 mm (± 100 mm) height above floor level
- according to DIN EN 15154-1:2006
- according to DIN 12899-3:2009 and ANSI Z358.1-2004
- DIN-DVGW tested and certificated

Manufacturer: B-SAFETY or equal

Article-No.: **BR 085 075** powder coated RED
BR 085 085 powder coated GREEN