


PremiumLine body safety shower with valve, ceiling mounted, exposed pipework

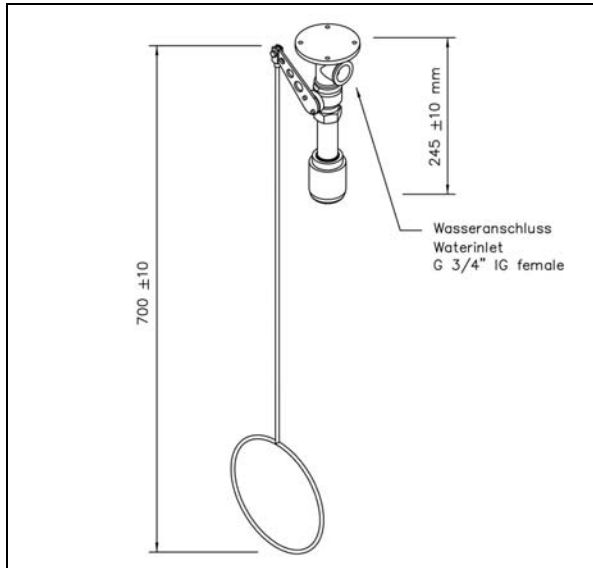

- shower arm 3/4" made of stainless steel, polished, total length 245 mm
 - ceiling flange 3/4" made of stainless steel, polished, water inlet 3/4" female
 - ball valve 3/4" made of stainless steel, with pull rod, DIN-DVGW tested and certificated
 - pull rod made of stainless steel, polished, length 700 mm
 - high-performance shower head made of stainless steel, polished, with improved spray pattern, corrosion resistant, largely scale and maintenance-free, very robust, self-draining
 - integrated automatic flow regulation 50 l/min. for a spray pattern acc. to the norms at a specified operating range of 1.5 to 3 bar dynamic water pressure
 - sign for body safety shower according to DIN 4844-2-D and BGV A8, self-adhesive 150 x 150 mm
 - installation height according to norms as listed below: lower edge of the shower head must be 2200 mm (± 100 mm) height above floor level
 - according to DIN EN 15154-1:2006
 - according to DIN 12899-3:2009 and ANSI Z358.1-2004
 - DIN-DVGW tested and certificated
- Manufacturer: B-SAFETY or equal
Article-No.: BR 085 095 STAINLESS STEEL