


BR 022 995

PremiumLine rod operated safety shower valve, wall mounted, exposed pipework

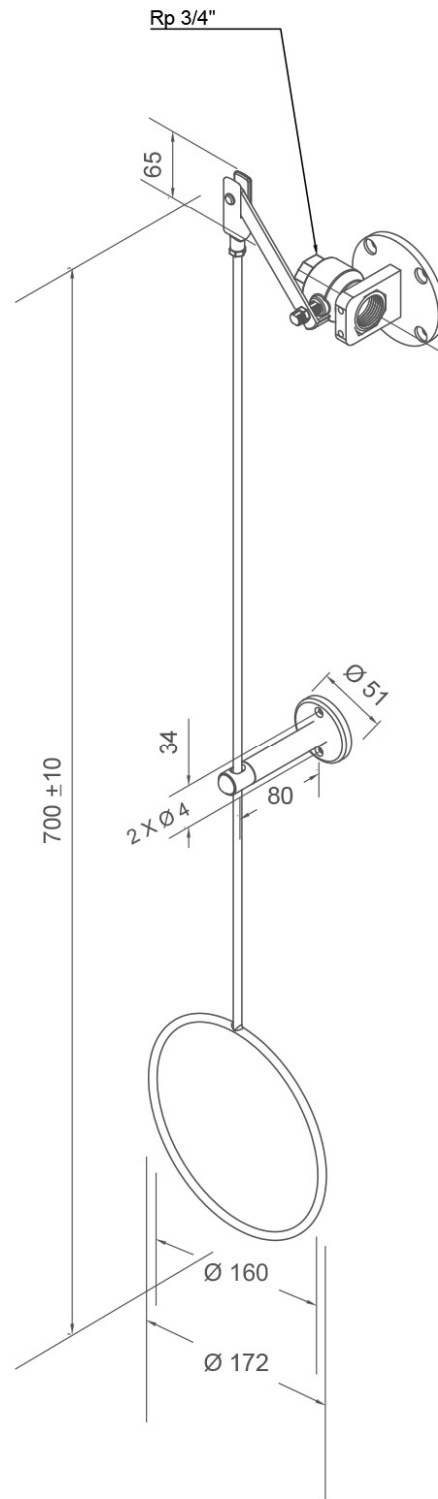

Technical description

PremiumLine rod operated safety shower valve, wall mounted, exposed pipework

- ball valve with pull rod actuation on wall flange of stainless steel, can be mounted either on the right or left side of the door, DIN-DVGW tested and certificated, water inlet ¾" female
- flow rate at least 60 l/min at 1 bar flow pressure
- pull rod with ring handle made of stainless steel, polished, length 700 mm
- holder for pull rod made of stainless steel, polished
- opening angle 90°, not self-closing
- information sign "OPEN" for confusion-free use in an emergency, orange, photoluminescent according to DIN 67510
- mounting height for lower edge of pull rod handle according to the standards listed below: 0 to 1750 mm height above floor
- according to BGI/GUV-I 850-0, DIN 1988 and DIN EN 1717
- according to ANSI Z358.1-2014, DIN EN 15154-1:2006 and DIN EN 15154-5:2019

Manufacturer: B-SAFETY or equal
Article-No.: BR 022 995

Technical specifications

Minimum flow pressure:	1 bar
Operating pressure:	1 to 5 bar
Flow rate:	at least 60 l/min at 1 bar flow pressure
Water inlet:	¾" female
Dimensions (H x W x D):	700 x 215 x 80 mm

Norm conformity

- DIN EN 15154-1:2006
- DIN EN 15154-5:2019
- ANSI Z358.1-2014

Approvals

-

Mounting-Instructions

For an installation in accordance with DIN EN 15154-1:2006 it must be ensured, that the safety shower installation is self-draining between valve and shower head.

Material-overview	Material	Material description
Valve holder on flange:	stainless steel	AISI 316
Ball valve:	stainless steel	AISI 316
Lever:	stainless steel	AISI 316
Clevis:	stainless steel	AISI 316
Pull rod with ring handle:	stainless steel	AISI 316
Pull rod holder:	stainless steel	AISI 316
OPEN-Sign:	plastic	-

Product overview

BR 022 995	PremiumLine rod operated safety shower valve, wall mounted, exposed pipework
-------------------	--