


BR 025 995

**PremiumLine safety shower valve with draining, wall mounted, exposed pipework**

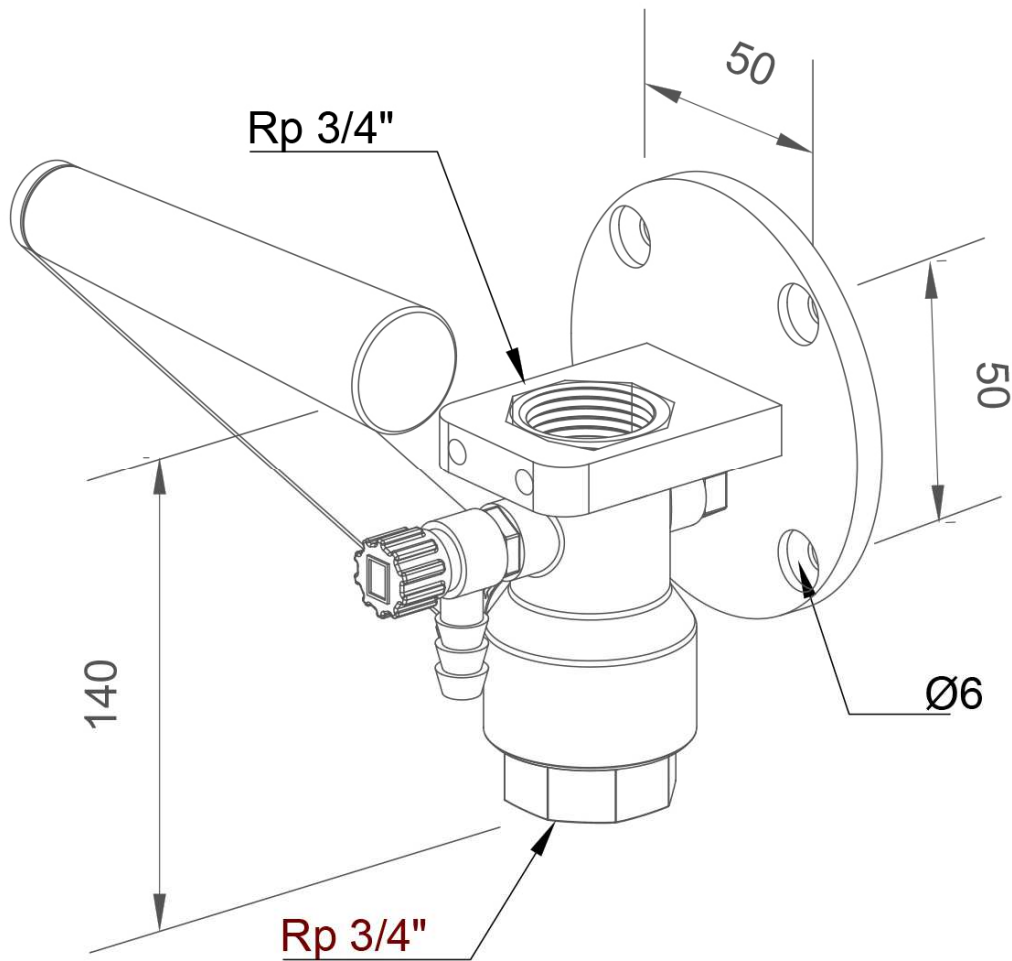

### Technical description

PremiumLine safety shower valve with draining, wall mounted, exposed pipework

- ball valve with lever actuation on wall flange of stainless steel, DIN-DVGW tested and certificated, water inlet 3/4" female
- flow rate at least 60 l/min at 1 bar flow pressure
- opening angle 90°, not self-closing
- lever made of stainless steel, polished, length 160 mm
- robust handle of plastics, black, diameter 25 mm, length 90 mm
- integrated draining valve for automatic or manual emptying
- information sign "OPEN" for confusion-free use in an emergency, orange, photoluminescent according to DIN 67510
- mounting height for lever according to the standards listed below: 0 to 1750 mm height above floor
- according to BGI/GUV-I 850-0, DIN 1988 and DIN EN 1717
- according to ANSI Z358.1-2014, DIN EN 15154-1:2006 and DIN EN 15154-5:2019

Manufacturer: B-SAFETY or equal  
Article-No.: BR 025 995

### Technical specifications

Minimum flow pressure:	1 bar
Operating pressure:	1 to 5 bar
Flow rate:	at least 60 l/min at 1 bar flow pressure
Water inlet:	3/4" female
Water drain (outside):	8 mm
Dimensions (H x W x D):	183 x 105 x 100 mm

### Norm conformity

- DIN EN 15154-1:2006
- DIN EN 15154-5:2019
- ANSI Z358.1-2014

### Approvals

-

### Mounting-Instructions

For an installation in accordance with DIN EN 15154-1:2006 it must be ensured, that the safety shower installation is self-draining between valve and shower head.

### Material-overview

### Material

### Material description

Valve holder:	stainless steel	AISI 316
Ball valve:	stainless steel	AISI 316
Lever:	stainless steel	AISI 316
Handle:	plastic	-
Draining:	plastic	-

### Product overview

### BR 025 995

PremiumLine safety shower valve with draining, wall mounted, exposed pipework