


BR 300 095

PremiumLine safety eye shower with stainless steel bowl, wall mounted,
exposed pipework

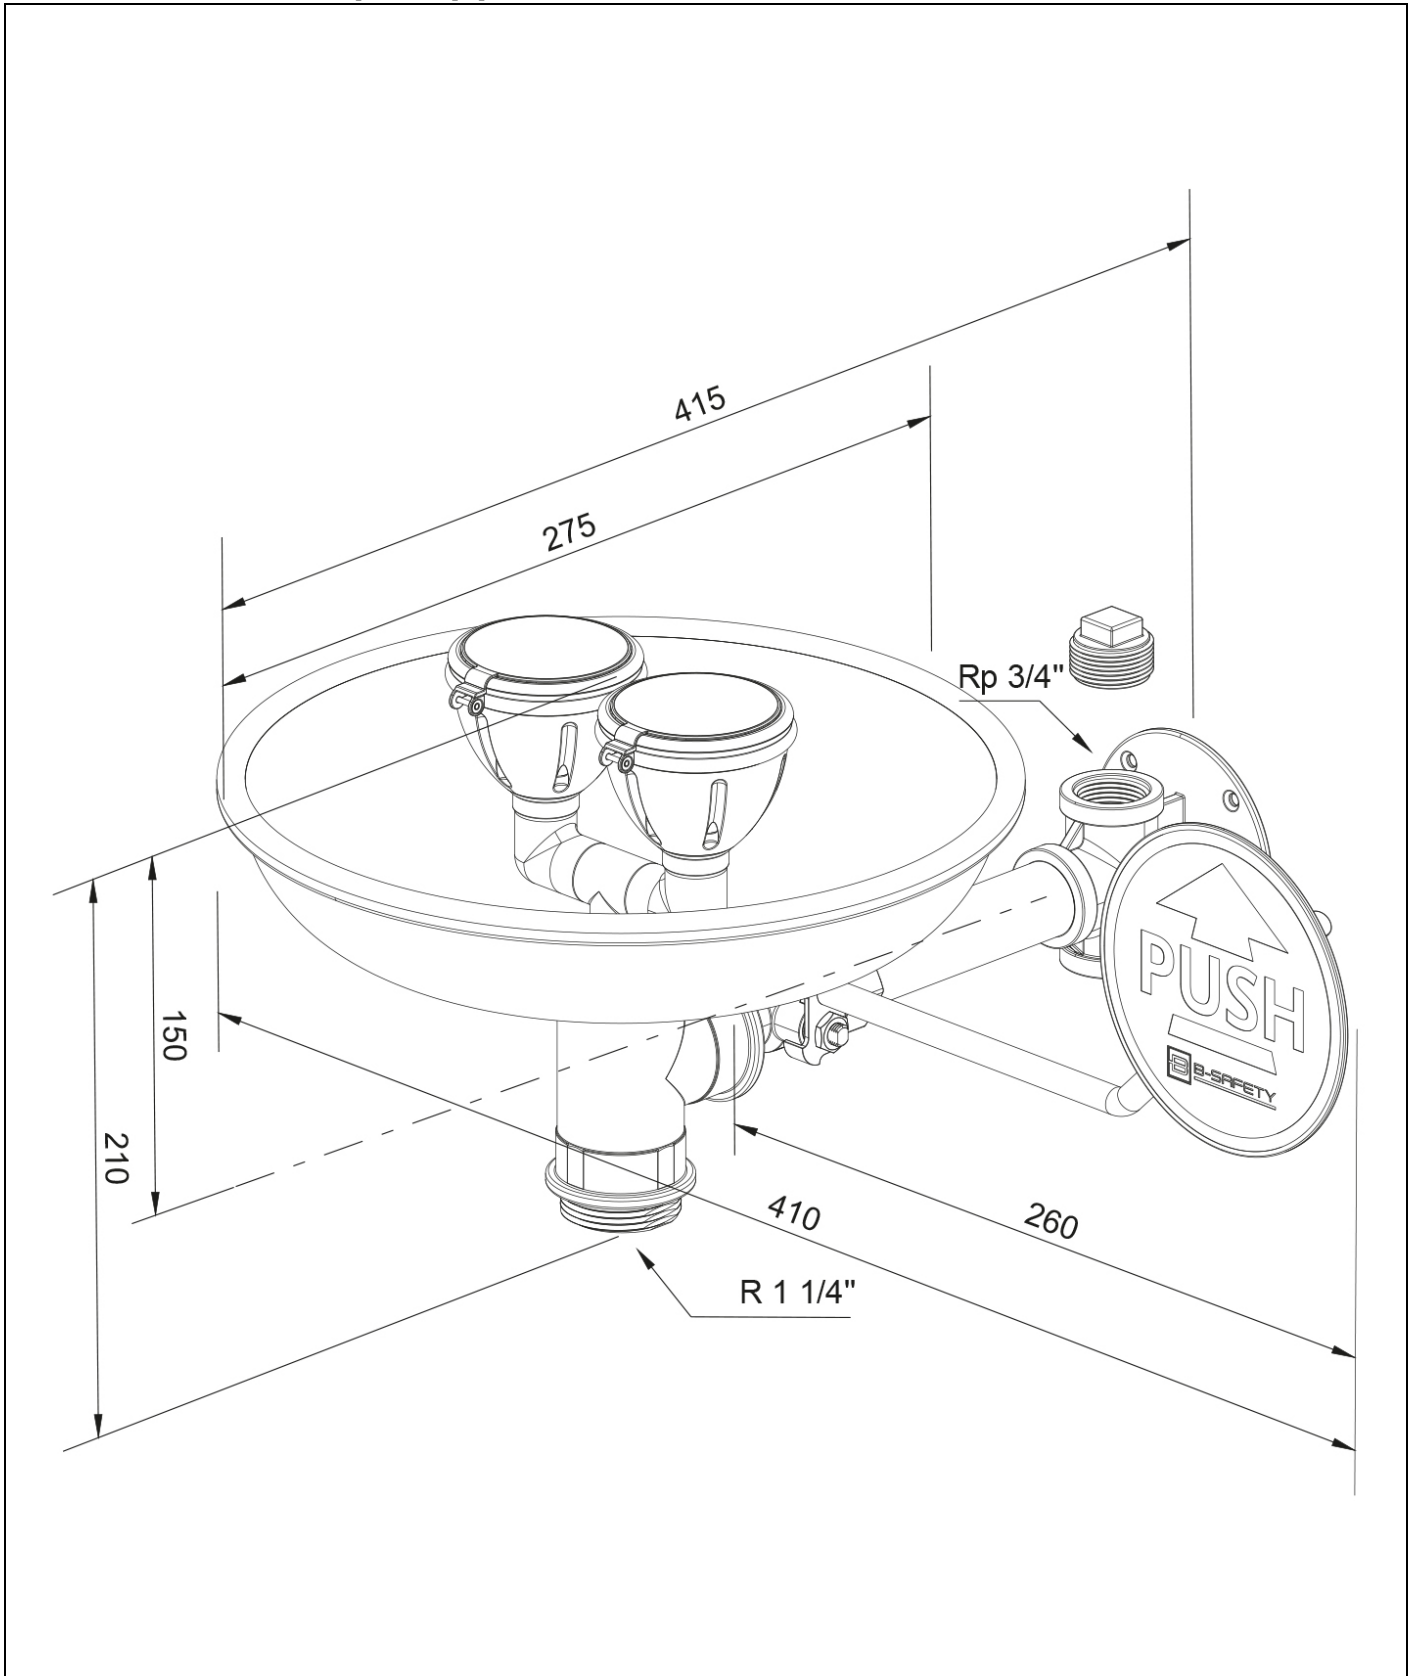

Technical description

PremiumLine safety eye shower with stainless steel bowl, wall mounted, exposed pipework

- wall flange 3-fold of stainless steel with 2 connections for integration into a circulation pipe, mounting plate made of stainless steel with 4 mounting holes, polished, water inlet 3/4" female
- plug 3/4" with stainless steel
- connection pipe of stainless steel for easy installation and alignment of the shower, polished
- ball valve 1/2" of stainless steel, with PUSH-lever actuation, DIN-DVGW tested and certificated
- big push plate made of stainless steel, polished, length 240 mm, with large signal "PUSH", luminescent according to DIN 67510
- integrated flow regulation 14 litre / minute for a standard-compliant jet pattern at a specified working range of 2.5 to 5 bar flow pressure
- high-performance spray heads made of stainless for large-scale dispersion of water, polished, with plastic spray plate, low calcification, incl. rubber sleeves and sealed dust caps, mounted over distributor fork
- bowl made of stainless steel, diameter 275 mm, polished, water outlet 1 1/4" male
- sign for eye shower according to EN ISO 7010 und ASR A1.3, self-adhesive PVC-film, 100 x 100 mm, viewing distance 10 metre
- height 210 mm, projection 415 mm, total width incl. lever 410 mm
- mounting height 860 mm (± 200 mm)
- according to BGI/GUV-I 850-0, DIN 1988 and EN 1717
- according to ANSI Z358.1-2014 and EN 15154-2:2006
- DIN-DVGW tested and certificated

Manufacturer: B-SAFETY or equal
Article-No.: BR 300 095

Technical specifications

Minimum flow pressure:	2.5 bar
Operating pressure:	2.5 to 5 bar
Flow rate:	14 l/min
Water inlet:	3/4" female
Water outlet:	1 1/4" male
Dimensions (H x W x D):	210 x 410 x 415 mm

Compliance with standards

- EN 15154-2:2006
- ANSI Z358.1-2014

Approvals

- DIN-DVGW, NW-0417CL0263

Material overview

Material

Material description

High-performance shower head:	stainless steel	AISI 316
U-distributor:	stainless steel	AISI 316
Ball valve:	stainless steel	AISI 316
Push plate:	stainless steel	AISI 316
Flow regulator:	plastic POM	-
Piping, T-pieces, adapter:	stainless steel	AISI 316
Wall flange, plug:	stainless steel	AISI 316
Bowl:	stainless steel	AISI 304
Sign for eye shower:	PVC-foil	-

www.b-safety.com

Product overview	
BR 300 095	PremiumLine safety eye shower with stainless steel bowl, wall mounted, exposed pipework