


BR 932 095

PremiumLine safety shower cubicle with eye shower, with catch basin, frame and side panels of stainless steel

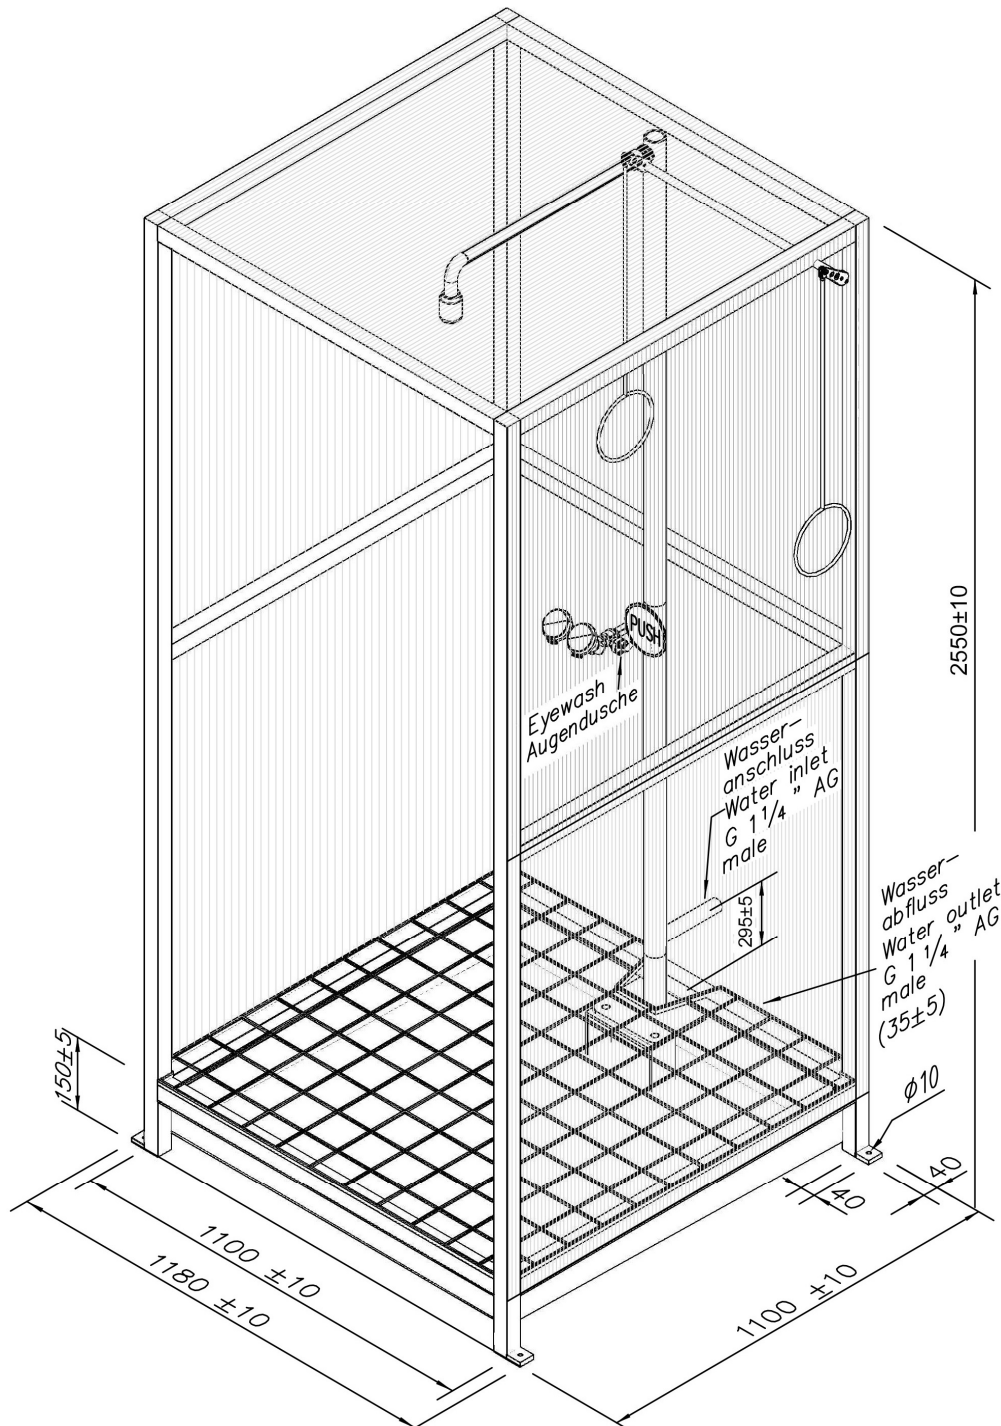

Note: The shower cubicle is not supplied in a sealed condition. This must be done at the factory during installation with sealants (e.g. silicone), to ensure that the side walls are sealed. Please note, that the emergency shower cubicle is open in the entrance area in order to ensure rapid first aid in the event of an emergency and that the water in this area cannot be completely collected in this area.

Technical description

PremiumLine safety shower cubicle with eye shower, with catch basin, frame and side panels of stainless steel

- frame made of massive stainless steel square tubes, dimensions (H x W x D): 2550 x 1100 x 1100 mm
- side panels of stainless steel, polished
- catch basin of stainless steel for safety showers, dimensions (L x W x H) 1100 x 1100 x 150 mm, drain pipe 1 1/4" male
- actuation of eye shower and/or safety shower over foot step grate of galvanized steel possible, fastening via stainless steel cable to pull rod or lever
- base plate with 4 mounting holes of stainless steel, polished, dimensions 200 x 200 mm
- stand pipe 1 1/4" of stainless steel two-part, polished, with top and bottom water inlet 1 1/4" male, total height 2330 mm
- connection piece 3/4" of stainless steel, for easy installation and alignment of the shower
- ball valve 3/4" of stainless steel, with quick connect system and pull rod actuation, DIN-DVGW tested and certificated
- pull rod with ring handle of stainless steel, polished, length 700 mm
- wall shower arm 3/4" of stainless steel, polished, projection 425 mm
- integrated automatic flow regulation 50 l/min. for a spray pattern acc. to the norms at a specified operating range of 1.5 to 3 bar dynamic water pressure
- high-performance shower head of stainless steel, polished, with improved spray pattern, corrosion resistant, largely calcification- and maintenance-free, very robust, self-draining
- sign for body safety shower according to EN ISO 7010 und ASR A1.3, self-adhesive PVC-film, 150 x 150 mm, viewing distance 15 meter
- integrated PremiumLine safety eye shower with two spray heads 45°, mounting height 970 mm, orientation of eye shower freely selectable on site
- connection pipe of stainless steel for easy installation and alignment of the shower, polished, water inlet 3/4" male
- ball valve 1/2" of stainless steel, with PUSH-lever actuation, DIN-DVGW tested and certificated
- big push plate made of stainless steel, polished, length 130 mm, with large signal "PUSH", luminescent according to DIN 67510
- integrated flow regulation 14 litre / minute for a standard-compliant jet pattern at a specified working range of 1.5 to 5 bar flow pressure
- high-performance spray heads made of stainless steel for large-scale dispersion of water, with plastic spray plate, largely free of calcification, with rubber sleeves and sealed dust caps with folding mechanism, mounted over distributor fork
- sign for eye shower according to EN ISO 7010 und ASR A1.3, self-adhesive PVC-film, 100 x 100 mm, viewing distance 10 meter
- total height 2550 mm, width 1100 mm, depth 1100 mm
- according to BGI/GUV-I 850-0, DIN 1988 and EN 1717
- according to ANSI Z358.1-2014, EN 15154-1:2006, EN 15154-2:2006 and EN 15154-5:2019
- DIN-DVGW tested and certificated

Manufacturer: B-SAFETY or equal
Article-No.: BR 932 095

Technical specifications

Minimum flow pressure:	1.5 bar
Operating pressure:	1.5 to 3 bar
Flow rate body shower:	50 l/min
Flow rate eye shower:	14 l/min
Water inlet:	1 1/4" male
Water outlet:	1 1/4" male
Material:	Stainless steel

Compliance with standards

- EN 15154-1:2006
- EN 15154-2:2006
- EN 15154-5:2019
- ANSI Z358.1-2014






Approvals

- DIN-DVGW, DVGW, NW-0417CL0263
- DIN-DVGW, DVGW, NW-0416CL0425
- GOST-R, Zertifikats-Nr. 0615463







Product overview	
BR 932 095	PremiumLine safety shower cubicle with eye shower, with catch basin, frame and side panels of stainless steel - flow rate 50 l/min (hazard class I according to EN 15154-5:2019)
BR 932 095 / 75L	PremiumLine safety shower cubicle with eye shower, with catch basin, frame and side panels of stainless steel - flow rate 75 l/min / 20 GPM (hazard class II according to EN 15154-5:2019)
BR 932 095 / 110L	PremiumLine safety shower cubicle with eye shower, with catch basin, frame and side panels of stainless steel - flow rate 110 l/min (hazard class III according to EN 15154-5:2019)

Accessories for industrial safety showers

Product overview	Model	Material	Water inlet	Water outlet	Article-No.
	Maintenance ball valve for eye showers and safety showers with removable trigger lever.	stainless steel	1 1/4" female	1 1/4" male	BR 830 950
	Thermostatic mixing valve for eye showers and safety showers, adjustment range 20 - 43°C, scald protection 43°C, flow rate 60 l/min at 2 bar flow pressure.	brass	3/4" male and 1" male	3/4" male and 1" male	BR 710 950
	Flow switch for eye showers and safety showers, protection degree IP 65, electrical supply with 1.5 m cable.	brass	1 1/4" female	1 1/4" female	BR 710 860
	Flow switch for eye showers and safety showers, protection degree IP 65, electrical supply with 1.5 m cable. EX-Zone 1 & 2.	brass	1 1/4" female	1 1/4" female	BR 710 860EX
	Switch for body safety shower alarm, complete pre-assembled on shower. EX-Zone 1 & 2.	plastic	-	-	BR 830 400
	Switch for eye shower alarm, complete pre-assembled on shower. EX-Zone 1 & 2.	plastic	-	-	BR 830 450
	Alarm system for eye showers & safety showers with siren-/flashlight combination. Prewired junction box inclusive electronic switch. Electrical supply: 230 V - 50 Hz	-	-	-	BR 015 800

www.b-safety.com

	Anti-scald valve, switching points: open at 41°C, close at 35°C.	stainless steel	1/2" female	1/2" female	BR 830 970
	Frost protection valve, switching points: open at 1°C, close at 4°C.	stainless steel	1/2" female	1/2" female	BR 830 980
	Connection adapter 1 1/4", T-piece, for connection of the protection valves before the safety shower water connection.	stainless steel	1 1/4" female	1 1/4" male 1/2" male	BR 830 986
	ANSI flange for eye showers and safety showers, B16.5, 150 LBS, form RF. Inclusive double nipple to 1 1/4" male.	stainless steel AISI 316	ANSI-flange 1 1/4"	1 1/4" male	BR 014 114
	DIN flange for eye showers and safety showers, PN 10, with mounting. Inclusive double nipple to 1 1/4" male.	stainless steel AISI 316	DIN-flange 1 1/4"	1 1/4" male	BR 016 114