
ClassicLine

www.b-safety.com

## BR 958 005 ClassicLine tank eyewash station with stainless steel tank



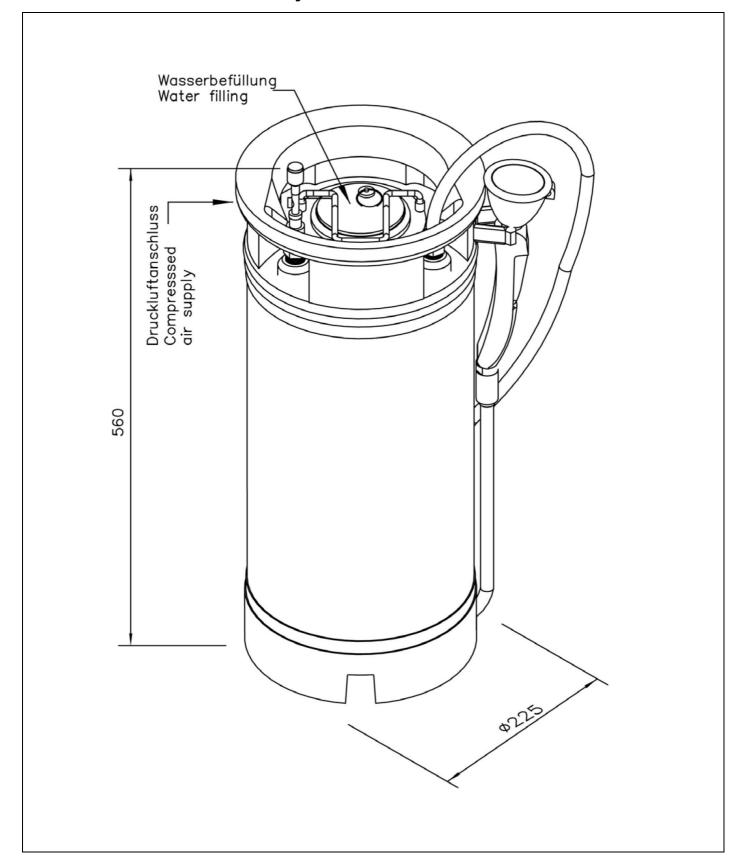

ClassicLine

## www.b-safety.com

## **Technical description**

ClassicLine tank eyewash station with stainless steel tank

- tank of stainless steel, with a capacity of 16 litres
- water inlet via large flap lid on the tank, compressed air connection tyre inflation valve
- for mobile use or when no water connection is available
- actuation by activation of the hand-held eye shower
- hand-held eye shower with one spray head, mounting by wall bracket on the tank
- ergonomically shaped handle with integrated, adjusting activation made of plastics, valve not self-closing
- aerators made of brass with a very limited spray pattern, chrome-plated
- integrated automatic flow regulator 7 litres / minute (1.7 litres / minute / 0.45 GPM) for a standard-compliant spray pattern
- integrated backflow preventer
- stainless steel covered hose, length 1.5 meter, water inlet 1/2" female, DIN-DVGW tested and certificated
- sign for eye shower according to EN ISO 7010 und ASR A1.3 mounted on the tank, self-adhesive PVC-film, 150 x 150 mm, viewing distance 15 metre
- dimensions (H x W x D): 560 x 225 x 225 mm
- according to ANSI Z358.1-2014 and EN 15154-4:2009

Manufacturer: B-SAFETY or equal

Article-No.: BR 958 005

l specifications

Material stainless steel, plastic

Dimensions (H x W): 560 x 225 mm

Filling volume: 14 litre
Filling pressure: 7 bar

Flow rates: 7 l/min / 1.7 l/min (0.45 GPM)
Flush times: about 2 minutes / 5 minutes

Water filling: Flap lid

Compressed air connection Tyre inflation valve

Norm conformity	Approvals	
- EN 15154-4:2009	- GOST-R, Zertifikats-Nr. 0615463	
- ANSI Z358.1-2014		

Product overview		
BR 958 005	ClassicLine tank eyewash station with stainless steel tank Flow rate 7 l/min - Flush time about 2 minutes	
BR 958 005 / 1L	ClassicLine tank eyewash station with stainless steel tank Flow rate 1.7 l/min (0.45 GPM) - Flush time about 5 minutes	



ClassicLine

www.b-safety.com

Accessories for Tank-Eyewash Stations						
Product overview	Model	Dimensions (H x W x D)	Capacity	Article-No.		
STADUL ST	Antibacterial addition for tank eyewash stations and tank safety showers. Disinfects and preserves water for up to 6 months, dosing: 10 ml to 100 litres water.	-	100 ml	BR 910 980		

